

A-Claw Couplings


Australian specification Claw couplings for conveyance of compressed air, water and other non corrosive liquids and gases.

Applications

- * Mining
- * Civil and industrial applications
- * Construction
- * Fire sprinkler systems
- * Municipal water supplies
- * Industrial air reticulation

Material Specifications

- * Spheroidal Graphite Iron,
- * Acid Zinc Plated
- * Nitrile Rubber Gasket

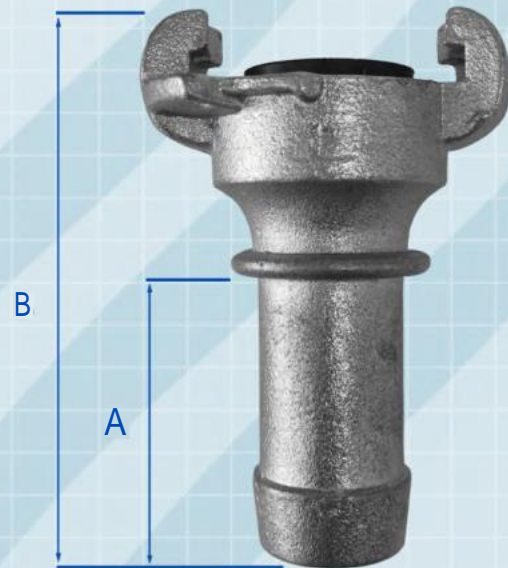

A-Claw Hosetail



BSP A-Claw



BSP Female A-Claw

HOSE SIZE N.B. mm	PIPE THREAD B.S.P.	DESCRIPTION	PART No.	A	B	e	D
12.5		12.5mm "A" CLAW HOSETAIL WITH SEAT	AUS704	45	86		
25		25mm "A" CLAW HOSETAIL WITH SEAT	AUS707	45	90		
-	1/2" FEMALE	1/2" B.S.P.P. "A" CLAW COUPLING WITH SEAT	AUS903			20	43
-	1" FEMALE	1" B.S.P.P. "A" CLAW COUPLING WITH SEAT	AUS905			24	46
-	1/2" MALE	1/2" B.S.P.T. "A" CLAW COUPLING WITH SEAT	AUS1003			16	52
-	1" MALE	1" B.S.P.T. "A" CLAW COUPLING WITH SEAT	AUS1005			16	55